

Specification



MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0.
Contact: Copper Alloy

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :12V AC/DC
Ambient Temperature Range :−20°C~+60°C
Storage Temperature Range :−40°C~+70°C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500VDC
Mating Cycles:5 000 Insertions

PIN NO.	PIN NAME
#1	(CD/DAT3)
#2	(CMD)
#3	(VSS1)
#4	(VDD)
#5	(CLK)
#6	(VSS2)
#7	(DAT0)
#8	(DAT1)
#9	(DAT2)

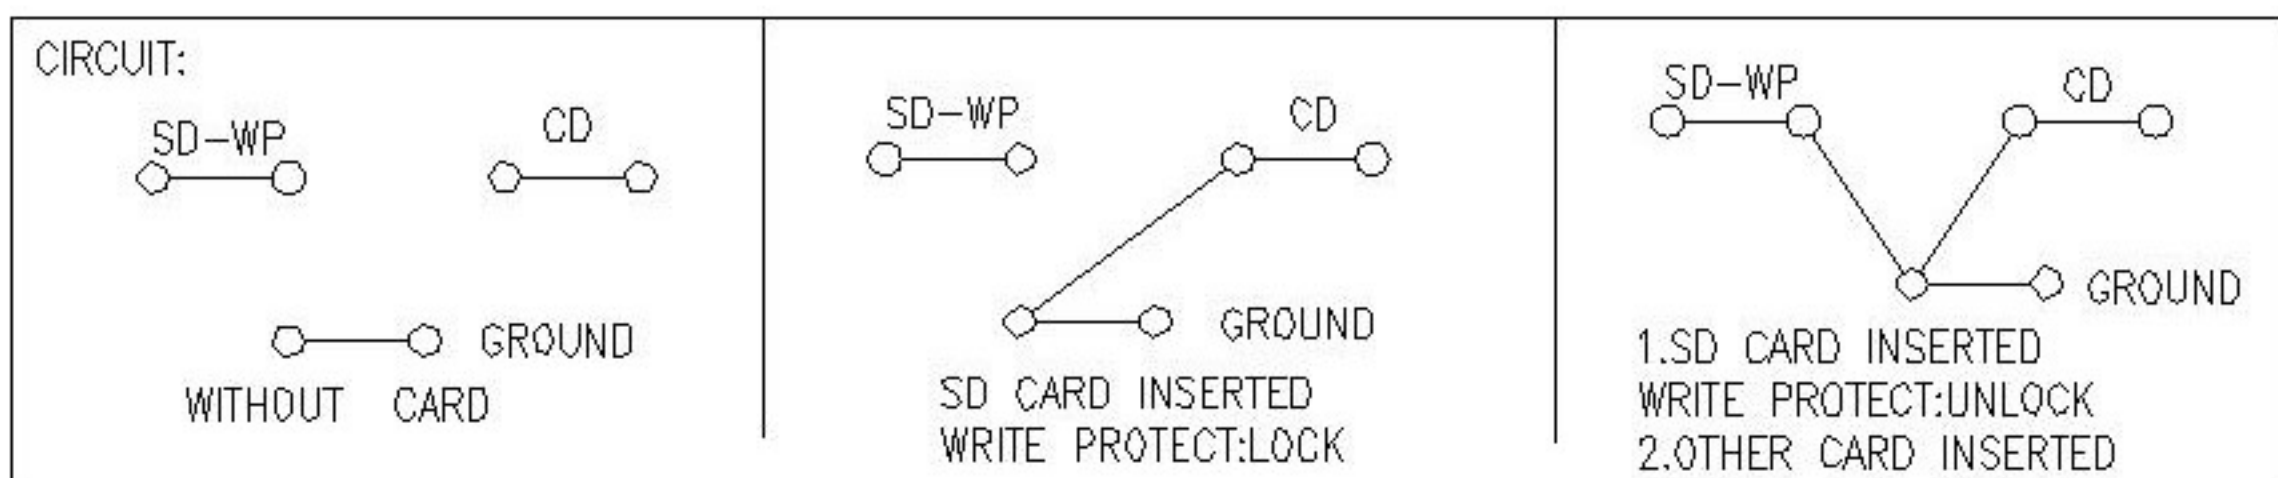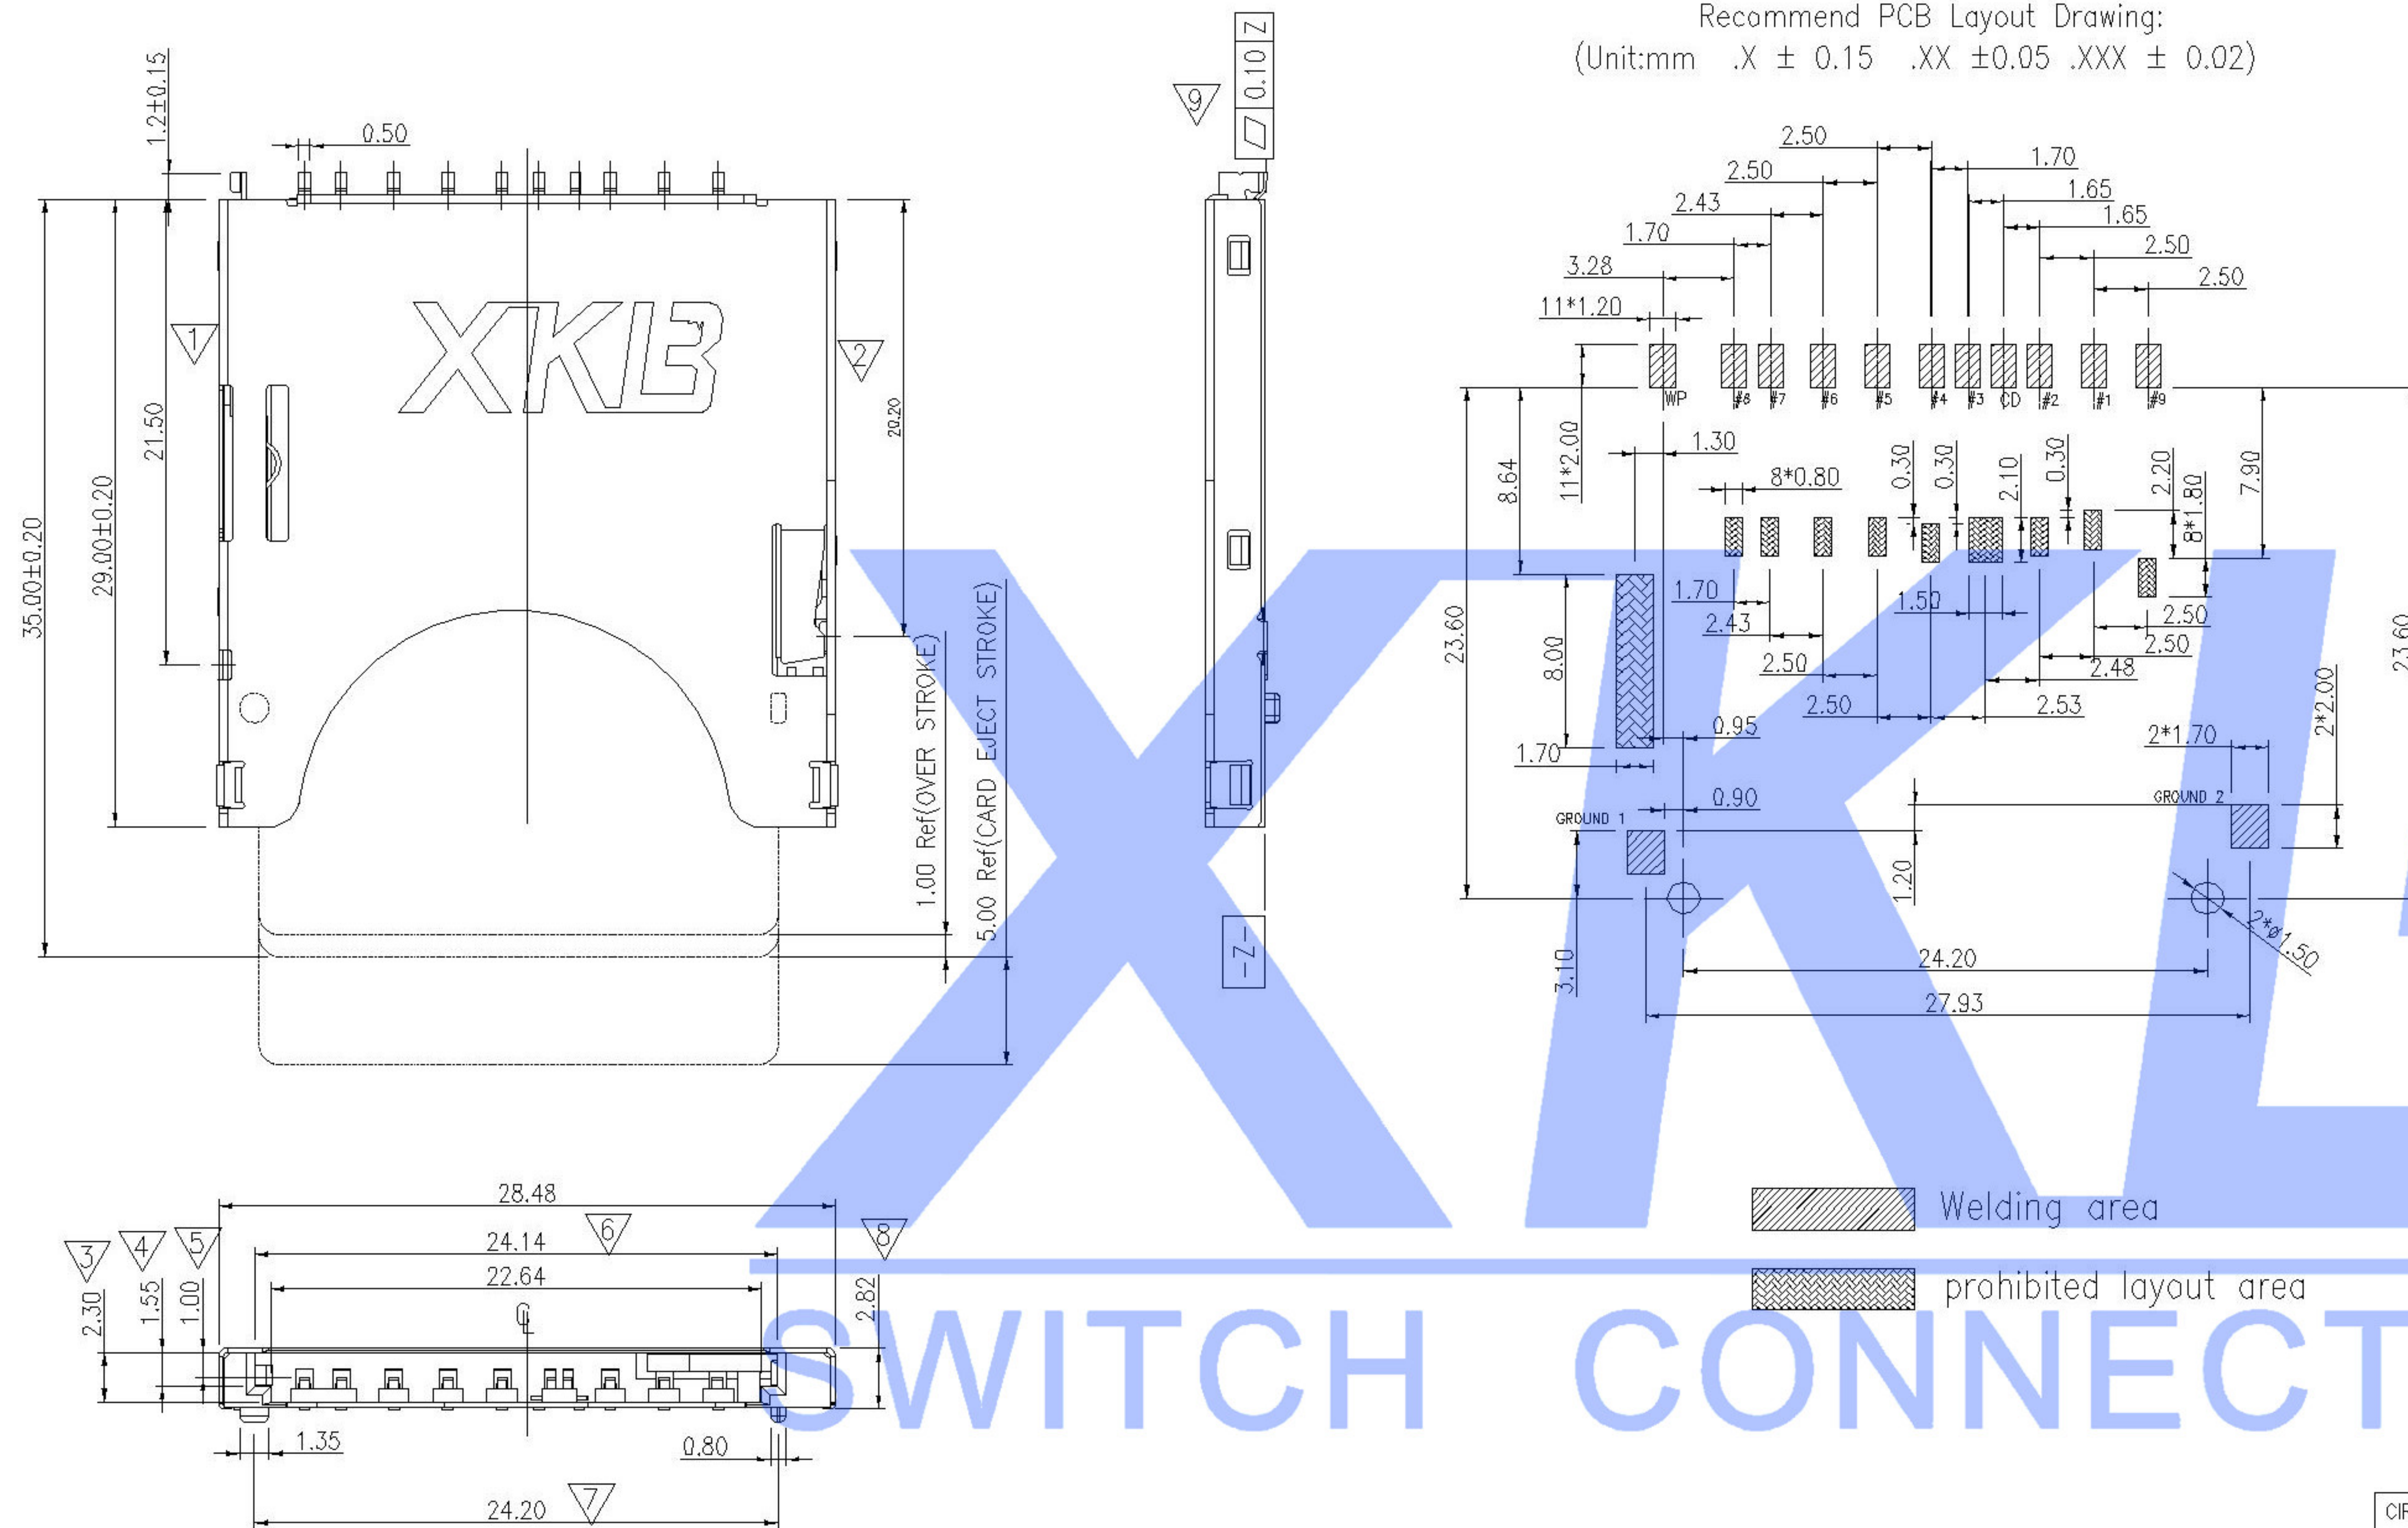

							DSND		DATE		SCALE: N/A	MODEL TYPE: SD CARD CONN			
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:			
△x					L≤4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: XKSD-006			
△x					4<L≤16	±0.3			DATE						
△x					16<L≤63	±0.4	APPD		DATE		SIZE: A4				
MARK	DESCRIPTION		DATE	REVISED	APPROVED	L>63		±0.5		DATE					
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1.0g	1/1	A0